

# Capstone™ FS-3100

## Fluorosurfactant

## Technical Information

### Description

Capstone™ FS-3100 is a nonionic fluorosurfactant that provides exceptionally low surface tension in aqueous- or solvent-based products, enabling better wetting, spreading, leveling, and other beneficial properties. FS-3100 does not contain any intentionally-added VOC or APEO, and is compatible with additives and resins of any ionic class.

Even at very low concentrations, FS-3100 can deliver tremendous wetting power. FS-3100 is stable in acidic, basic, brine, and hard water environments—making it easy to formulate into a variety of systems. The absence of solvent makes FS-3100 a particularly effective additive to organic polymers, as well as solvent-based paints and coatings. It is also effective as an additive in cleaning products, paints, coatings, adhesives, and films.

### Applications

#### Water-Based Floor Care (Finishes, Waxes, and Polishes)

- Provides wetting and leveling
- Good re-wet characteristics in multi-coat applications
- Reduces cratering and provides faster spreading
- Compatible with hydrocarbon surfactants
- Suggested use rates are 0.01–0.05% active ingredient (A.I.)

#### Concentrated Cleaning Solutions

- Reduces surface tension and provides excellent wetting to achieve cleanability
- Provides improved wetting and penetration, especially with difficult to wet soils
- Suggested use rates are 0.01–0.1% A.I.

### Metals and Electronics


- Improved etching efficiency
- Effective plating bath aid
- Zinc battery scale inhibitor
- Low foamer in photoresist strippers

### Typical Properties

Appearance	Clear, viscous, pale yellow to light amber liquid
Specific Gravity	1.35–1.39
Stability	Freeze-thaw stable. Stable in brine and aggressive media. Mix well before use.
Composition	100% solids
Shelf Life	5 years
Flash Point	Does not flash

### Performance

#### Surface Tension

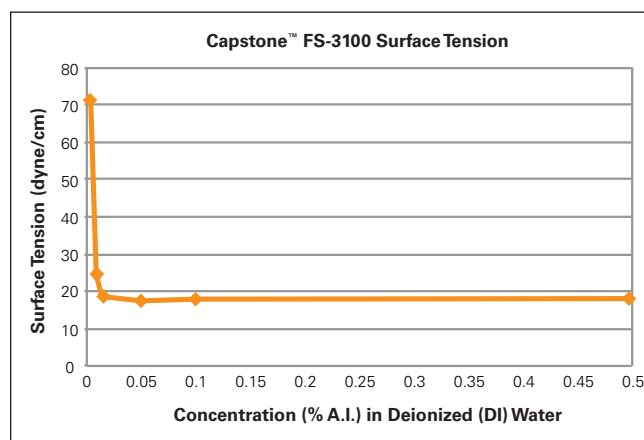

## Foaming

- Low foamer

### Ross-Miles Foam Volume (mL) at 25 °C (77 °F) at 0.1% Active Ingredient (A.I.)

	Initial	5 min	10 min	15 min
DI Water	62	61	60	58
10% NaCl	33	30	29	29

## Additional Applications

### Paints and Coatings

- Compatible with most aqueous- or solvent-based paints
- Will migrate and become part of the cured paint in 2K polyurethane paints
- Can be used in UV coating applications

### Aqueous-Based Paints and Inks

- Excellent wetting and leveling, reduced orange peel effect, extend the open time
- Compatible with most aqueous-based paints
- Improved wetting in wood coatings
- Suggested use rates are 0.01–0.1% A.I. in aqueous-based paints

## Handling

- Warm to 35 °C (95 °F) and mix well before use
  - Especially when taking a partial sample from the container
  - For drum size containers, thorough agitation, including use of a drum agitator with low speed mixing, may be necessary to ensure consistent percentage solids throughout

## Capstone™ Repellents and Surfactants

- Deliver maximum performance
- Regulatory and stewardship information is available upon request
- Are listed on TSCA inventory

## Package Sizes

Drum–400 lb (181.6 kg), Pail–50 lb (22.7 kg), Nalgene bottle–8 lb (3.632 kg)

For questions regarding technical data, commercial supply, and sampling:

## Chemours Advanced Performance Materials

### Technical Inquiries

Asia Pacific +86.400.671.6789  
 Europe +41.22.719.1537  
 Latin America +55.08.0011.0728  
 North America +1.866.828.7009

## Regional Technical Customer Service Center, Americas

The Chemours Company  
 Chemours Discovery Hub  
 201 Discovery Boulevard  
 Newark, DE 19713 USA  
 +1.866.828.7009

For more information, visit [www.chemours.com/capstone](http://www.chemours.com/capstone)

**CAUTION:** Do not use or resell Chemours™ materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless agreed to by Seller in a written agreement covering such use. For further information, please contact your Chemours representative. For medical emergencies, spills, or other critical situations, call (866) 595-1473 within the United States. For those outside of the United States, call (302) 773-2000.

The information set forth herein is furnished free of charge and based on technical data that Chemours believes to be reliable. It is intended for use by persons having technical skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Because conditions of product use are outside our control, Chemours makes no warranties, express or implied, and assumes no liability in connection with any use of this information. As with any material, evaluation of any compound under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate under or a recommendation to infringe any patents.

NO PART OF THIS MATERIAL MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF CHEMOURS.